

WESTERN ELECTRO - ACOUSTIC LABORATORY

A division of Veneklasen Associates, Inc.

TESTING • CALIBRATION • RESEARCH

25132 Rye Canyon Loop Santa Clarita, California 91355 Tel: (661) 775-3741 Fax: (661) 775-3742 www.weal.com

SOUND TRANSMISSION LOSS TEST REPORT NO. TL16-369

CLIENT: Clark Dietrich

6510 General Rd. 13 Sep 2016

Riverside, CA 92509

TEST DATE: 08 August 2016

INTRODUCTION

The test was performed in accordance with ASTM E 90-09, Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and ASTM E2235-04^{£1}, Standard Test Method for Determination of Decay Rates for Use in Sound Insulation Test Methods. Copies of the test standard are available at www.astm.org. The test chamber source and receiving room volumes are 204 and 148.4 cubic meters respectively. Western Electro-Acoustic Laboratory is accredited by the United States Department of Commerce, National Institute of Standards and Technology under the National Voluntary Accreditation Program (NVLAP) Lab Code 100256-0 for this test procedure. This test report relates only to the item(s) tested. This report must not be used to claim product certification, approval, or endorsement by WEAL, NVLAP, NIST or any agency of the federal government.

DESCRIPTION OF TEST SPECIMEN

The test specimen was a wall assembly constructed from 3-5/8" Clark Dietrich Prostud 33 mil track and studs. The following components were used in the construction of the specimen:

Prostud 33 mil track and studs, ClarkDietrich RC—Deluxe resilient channel, 3-1/2" R-13 unfaced insulation, and 5/8 inch type "X" gypsum panels.

Test Configuration

	Source Side Co	omponents	Frame Assembly	Receive Side Components		
5	5/8" Type "X" RC-Deluxe		3-5/8" 33 mil Prostud w/ Insulation	5/8" Type "X"		

- Screw spacing was at 203 mm (8 inches) on center (O.C.) around the perimeter and 610 mm (24 inches) O.C. in the field
- All gypsum board was oriented vertically. All the joints were sealed with a bead of latex caulking and metal foil tape.
- The overall dimensions of the wall assembly were 2.44 m (96 inches) wide by 2.44 m (96 inches) high by 124 mm (4-7/8 inches) thick.
- The overall weight of the assembly was estimated to be 158 kg (348 lbs) for a calculated surface density of 26.6 kg/m² (5.44 lbs./ft²).

RESULTS OF THE MEASUREMENTS

One-third octave band sound transmission loss values are plotted and tabulated on the attached sheet. ASTM minimum volume requirements are met at 80 Hz and above. The Outdoor-Indoor Transmission Class rating determined in accordance with ASTM E 1332-10a was OITC-34. The Sound Transmission Class rating determined in accordance with ASTM E 413-10 was STC-50.

Respectfully submitted,

Western Electro-Acoustic Laboratory

Table

Approved:

Stephen A. Martin, Ph.D., P.E.

Acoustical Test Technician


Raul Martinez

Laboratory Director

Report must be distributed in its entirety except with written permission from Western Electro-Acoustic Laboratory

WESTERN ELECTRO-ACOUSTIC LABORATORY

Report No. TL16-369

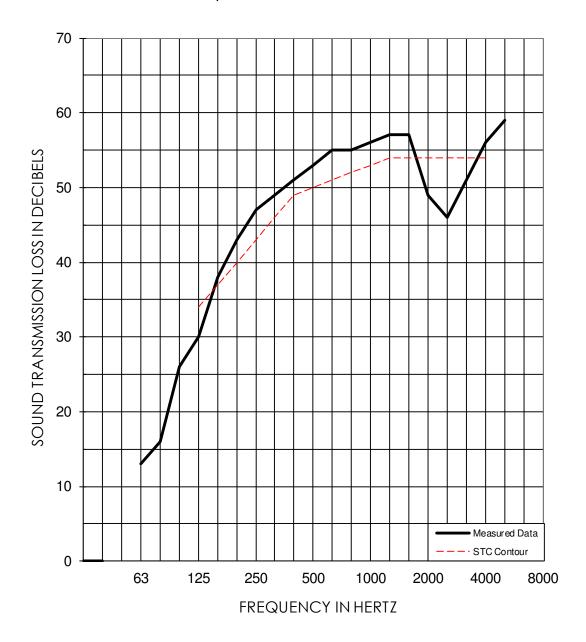

1/3 OCT BAND CNTR FREQ	63	80	100	125	160	200	250	315	400	500
TL in dB	13	16	26	30	38	43	47	49	51	53
95% Confidence in dB	1.42	1.92	2.07	1.47	0.89	0.76	0.80	0.52	0.36	0.38
deficiencies				(4)						
1/3 OCT BAND CNTR FREQ	630	800	1000	1250	1600	2000	2500	3150	4000	5000
TL in dB	55	55	56	57	57	49	46	51	56	59
95% Confidence in dB	0.29	0.44	0.38	0.39	0.36	0.56	0.55	0.31	0.32	0.50
deficiencies						(5)	(8)	(3)		
EWR OITC	Test Date: 08 August 2016									STC
53 34	Specimen Area: 64 sq.ft.								50	
Temperature: 76.8 deg. F										(20)

Relative Humidity: 46 %

Report must be distributed in its entirety except with written permission from Western Electro-Acoustic Laboratory $Page\ 2\ of\ 2$

