1512 S BATAVIA AVENUE GENEVA, IL 60134

630-232-0104

SPONSOR: ClarkDietrich West Chester, OH

CONDUCTED: 2019-04-09

ON: Insulated 24 in. on center steel stud gypsum board wall, 2 layers with RCSD on source side, 2 layers on receive side

TEST METHODOLOGY

Riverbank Acoustical Laboratories[™] is accredited by the U.S. Department of Commerce, National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP) as an ISO 17025:2005 Laboratory (NVLAP Lab Code: 100227-0) and for this test procedure. The test reported in this document conformed explicitly with ASTM E90-09 (2016): "Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements." The single number rating of the specimen was calculated according to ASTM E413-16: "Classification for Rating Sound Insulation." A description of the measurement procedure and room specifications is available upon request. The transmission loss values are for a single direction of measurement. The results presented in this report apply to the sample as received from the test sponsor.

SPECIMEN MEASUREMENTS & TEST CONDITIONS

The test specimen was designated by the sponsor as Insulated 24 in. on center steel stud gypsum board wall, 2 layers with RCSD on source side, 2 layers on receive side. The building contractor and RAL staff compiled the following construction specification as follows, in order of installation:

Plates / Base Track

Trade Name:	ProTRAK® 20 (18 mil)
Dimensions:	2 @ 2438.4 mm (96 in.) x 31.75 mm (1.25 in.)
Depth:	92.07 mm (3.625 in.)
Steel Thickness:	Nominal @ 0.46 mm (0.018 in.)
	Measured @ 0.48 mm (0.019 in.)
Installation:	Friction fit to test frame over foam sill sealer
Overall Weight:	2.95 kg (6.5 lbs)
Mass per Unit Length:	0.60 kg/m (0.41 lbs/ft)



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT. THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

An MALION Technical Center

Test Report

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

Sound Transmission Loss <u>RALTM-TL19-095</u>

Page 1 of 10

1512 S BATAVIA AVENUE GENEVA, IL 60134

630-232-0104

ClarkDietrich 2019-04-09

Studs

Test Report

An MALION Technical Center

RIVERBANK.ALIONSCIENCE.COM

FOUNDED 1918 BY WALLACE CLEMENT SABINE

RAL™-TL19-095

Page 2 of 10

Stuus				
Trade Name:	ProSTUD® 20 (18 mil)			
Dimensions:	5 @ 31.75 mm (1.25 in.) x 2743.2 mm (108 in.)			
Depth:	92.07 mm (3.625 in.)			
Steel Thickness:	Nominal @ 0.46 mm (0.018 in.)			
	Measured @ 0.48 mm (0.019 in.)			
Installation:	Side studs screwed to test frame, other studs floating in track			
Fasteners	Type W bugle head drywall screws, 31.75 mm (1.25 in.) length			
Stud Spacing:	609.6 mm (24 in.) on center			
Overall Weight:	8.62 kg (19 lbs)			
Mass per Unit Length:	0.63 kg/m (0.42 lbs/ft)			
Note: A 6.35 mm (0.25 in.) diameter bead of acoustical sealant was used to seal both sides of				
the specimen where framing members met the test frame $(0.45 \text{ kg} (1 \text{ lbs}) \text{ total})$.				

Source Side

Resilient Channel	
Trade Name:	RC Deluxe® Resilient Channel (RCSD)
Dimensions:	6 @ 2438.4 mm (96 in.) x 63.5 mm (2.5 in.)
Overall Thickness:	12.7 mm (0.5 in.)
Installation:	Screwed to studs, rows spaced 609.6 mm (24 in.) on center
	Mounted horizontally with resilient flange facing up
	Resilient flange on bottom row facing down
Fasteners:	#8 wafer head stud screw, 12.7 mm (0.5 in.) length
Overall Weight:	4.76 kg (10.5 lbs)
Mass per Unit Length:	0.33 kg/m (0.22 lbs/ft)
Layer 1	
Material:	Type X gypsum board
Dimensions:	1 @ 1219.2 mm (48 in.) x 2743.2 mm (108 in.)
	2 @ 609.6 mm (24 in.) x 2743.2 mm (108 in.)
Thickness:	15.88 mm (0.625 in.)
Installation:	Screwed to resilient channel
Fasteners:	Type S bugle head drywall screws, 25.4 mm (1 in.) length
Fastener Spacing:	304.8 mm (12 in.) on center
Overall Weight:	
Mass per Unit Area:	$10.82 \text{ kg/m}^2 (2.22 \text{ lbs/ft}^2)$



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT. THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

1512 S BATAVIA AVENUE GENEVA, IL 60134

ClarkDietrich

2019-04-09

630-232-0104

An MALION Technical Center

RIVERBANK.ALIONSCIENCE.COM

Test Report

WALLACE CLEMENT SABINE

FOUNDED 1918 BY

<u>RAL^{тм}-TL19-095</u>

Page 3 of 10

Source Side (continued)

Layer 2	
Material:	Type X gypsum board
Dimensions:	2 @ 1219.2 mm (48 in.) x 2743.2 mm (108 in.)
Thickness:	15.88 mm (0.625 in.)
Installation:	Screwed through Layer 1 to resilient channel
Fasteners:	Type S bugle head drywall screws, 41.28 mm (1.625 in.) length
Fastener Spacing:	304.8 mm (12 in.) on center
Overall Weight:	72.57 kg (160 lbs)
Mass per Unit Area:	$10.85 \text{ kg/m}^2 (2.22 \text{ lbs/ft}^2)$

Cavity

Material:	R-13 unfaced fiberglass insulation batts
Dimensions:	4 @ 609.6 mm (24 in.) x 2743.2 mm (108 in.)
Thickness:	88.9 mm (3.5 in.)
Installation:	Friction fit into cavities between studs
	8.39 kg (18.5 lbs)
Density:	$14.11 \text{ kg/m}^3 (0.88 \text{ lbs/ft}^3)$

Receive Side

Type X gypsum board
2 @ 1219.2 mm (48 in.) x 2743.2 mm (108 in.)
15.88 mm (0.625 in.)
Screwed to studs
Type S bugle head drywall screws, 28.58 mm (1.125 in.) length
203.2 mm (8 in.) on center at board perimeter
304.8 mm (12 in.) on center at board field
72.12 kg (159 lbs)
$10.78 \text{ kg/m}^2 (2.21 \text{ lbs/ft}^2)$



INVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT. THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

1512 S BATAVIA AVENUE GENEVA, IL 60134

ClarkDietrich 2019-04-09

630-232-0104

An MALION Technical Center

RIVERBANK.ALIONSCIENCE.COM

Test Report

FOUNDED 1918 BY WALLACE CLEMENT SABINE

RAL[™]-TL19-095

Page 4 of 10

Receive Side (continued)

Layer 2	
Material:	Type X gypsum board
Dimensions:	1 @ 1219.2 mm (48 in.) x 2743.2 mm (108 in.)
	2 @ 609.6 mm (24 in.) x 2743.2 mm (108 in.)
Thickness:	15.88 mm (0.625 in.)
Installation:	Screwed through Layer 1 to studs
Fasteners:	Type S bugle head drywall screws, 50.8 mm (2 in.) length
Fastener Spacing:	203.2 mm (8 in.) on center at board perimeter
	304.8 mm (12 in.) on center at board field
Overall Weight:	72.46 kg (159.75 lbs)
Mass per Unit Area:	10.83 kg/m ² (2.22 lbs/ft ²)

Note: Joints and screw heads on the outermost layers of both sides of the partition were treated with a thin bead of sealant and metal tape (0.23 kg (0.5 lbs) total). Fasteners at the top and bottom tracks were offset to avoid coupling the track to the studs.

Overall Specimen Measurements

Dimensions:	2.44 m (96.0 in) wide by 2.74 m (108.0 in) high
Thickness:	0.17 m (6.625 in)
Weight:	314.91 kg (694.25 lbs)
Transmission Area:	$6.689 \text{ m}^2 (72 \text{ ft}^2)$
Mass per Unit Area:	47.08 kg/m ² (9.64 lbs/ft ²)

Test Aperture

Size:	2.74 m (9.0 ft.) by 4.27 m (14.0 ft.)
Filler Wall:	Yes
Sealed:	Entire periphery (both sides) with dense mastic

Test Environment

Source Room	
Volume:	177.11 m ³
Temperature:	$23.3 \ ^{\circ}C \pm 0.0 \ ^{\circ}C$
Relative Humidity:	$51.0\% \pm 0.0\%$
Receive Room	
Volume:	178.33 m ³
Temperature:	$22.5 \ ^{\circ}C \pm 0.6 \ ^{\circ}C$
Relative Humidity:	50.5 % ± 1.0 %
Requirements	

Temperature: 22° C +/- 2° C, not more than 3° C change over all tests. Relative Humidity: $\geq 30\%$, not more than +/- 3% change over all tests.



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT. THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An MALION Technical Center

Test Report

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

RALTM-TL19-095

Page 5 of 10

ClarkDietrich 2019-04-09



Figure 1 – Specimen mounted in test opening, as viewed from source room



Figure 2 – Sealing method for perimeter framing members, floating stud



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT. THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An MALION Technical Center

Test Report

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY WALLACE CLEMENT SABINE

ClarkDietrich 2019-04-09

RALTM-TL19-095

Page 6 of 10



Figure 3 - Stud cavity insulation and resilient channel installed



Figure 4 – Fastener placement, labeling on resilient channel



RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT. THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

1512 S BATAVIA AVENUE GENEVA, IL 60134

630-232-0104

An MALION Technical Center

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY

RAL™-TL19-095

WALLACE CLEMENT SABINE

Page 7 of 10

ClarkDietrich 2019-04-09

TEST RESULTS

Sound transmission loss values are tabulated at the eighteen standard frequencies. A graphic presentation of the data and additional information appear on the following pages. The precision of the transmission loss test data is within the limits set by the ASTM Standard E90-09 (2016).

<u>FREQ.</u>	TL	ΔTL	DEF.		FREQ.	TL	ΔTL	DEF.
				_				
	• •							
100	30	0.88	0		800	65	0.16	0
125	39	0.54	5		1000	66	0.17	0
160	44	0.60	3		1250	66	0.11	0
200	49	0.41	1		1600	64	0.09	0
250	51	0.39	2		2000	57	0.06	7
315	56	0.30	0		2500	58	0.07	6
400	58	0.25	1		3150	62	0.08	2
500	61	0.14	0		4000	66	0.11	0
630	63	0.19	0		5000	69	0.19	0

STC=60

ABBREVIATION INDEX

FREQ. = FREQUENCY, HERTZ

TL = TRANSMISSION LOSS, dB

 $\Delta TL = 95\%$ CONFIDENCE INTERVAL FOR TL MEAUREMENTS, dB

DEF. = DEFICIENCIES, dB BELOW STC CONTOUR (SUM OF DEF = 27)

STC = SOUND TRANSMISSION CLASS

Tested by Marc Sciaky

Approved b

Senior Experimentalist

Report by Malcolm Kelly

Acoustical Test Engineer

Eric P. Wolfram Laboratory Manager



INVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT. THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

Test Report

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104 An MALION Technical Center

Test Report

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY


WALLACE CLEMENT SABINE RALTM-TL19-095

Page 8 of 10

ClarkDietrich 2019-04-09

SOUND TRANSMISSION REPORT

Insulated 24 in. on center steel stud gypsum board wall, 2 layers with RCSD on source side, 2 layers on receive side

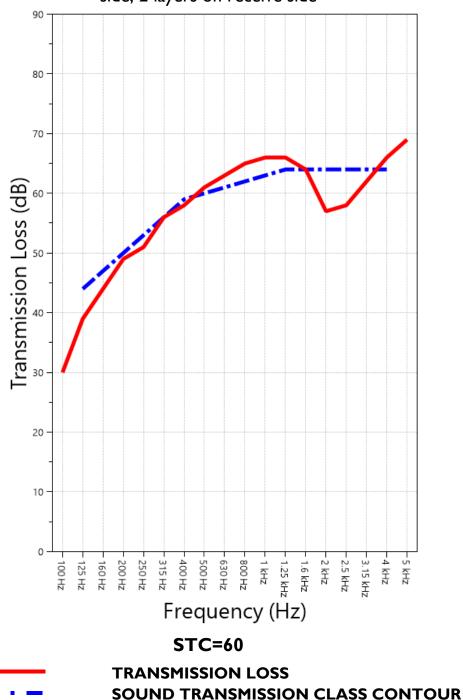



INVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT. THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

1512 S BATAVIA AVENUE GENEVA, IL 60134

630-232-0104

ClarkDietrich 2019-04-09

APPENDIX A: Extended Frequency Range Data

Specimen: Insulated 24 in. on center steel stud gypsum board wall, 2 layers with RCSD on source side, 2 layers on receive side (See Full Report)

The following non-accredited data were obtained in accordance with ASTM E90-09 (2016), but extend beyond the defined frequency range of 100Hz to 5,000Hz. These unofficial results are representative of the RAL test environment only and intended for research & comparison purposes. Sampling precision observed during this procedure is reported below.

1/3 Octave Band Center Frequency (Hz)	Sound Transmission Loss (dB)	ATL (Eq. A2.5) (dB)
31.5	20	1.43
40	20	0.69
50	15	1.02
63	18	0.93
80	27	0.58
100	30	0.88
125	39	0.54
160	44	0.60
200	49	0.41
250	51	0.39
315	56	0.30
400	58	0.25
500	61	0.14
630	63	0.19
800	65	0.16
1000	66	0.17
1250	66	0.11
1600	64	0.09
2000	57	0.06
2500	58	0.07
3150	62	0.08
4000	66	0.11
5000	69	0.19
6300	72	0.26
8000	70	0.22
10000	62	0.23
12500	57	0.28



INVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT. THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

RIVERBANK.ALIONSCIENCE.COM

RAL™-TL19-095

Test Report

An MALION Technical Center

FOUNDED 1918 BY

WALLACE CLEMENT SABINE

Page 9 of 10

1512 S BATAVIA AVENUE GENEVA, IL 60134 630-232-0104

An MALION Technical Center

Test Report

RIVERBANK.ALIONSCIENCE.COM FOUNDED 1918 BY

ClarkDietrich

2019-04-09

APPENDIX B: Instruments of Traceability

Specimen: Insulated 24 in. on center steel stud gypsum board wall, 2 layers with RCSD on source side, 2 layers on receive side (See Full Report)

Description	Model	Serial Number	Date of Certification	Calibration <u>Due</u>
System 2	Type 3160-A-042	3160- 106974	2018-08-09	2019-08-09
Bruel & Kjaer Mic And Preamp D	Type 4943-B-001	2311440	2018-09-28	2019-09-28
Bruel & Kjaer Pistonphone	Type 4228	2781248	2018-08-06	2019-08-06
EXTECH Hygro 330 EXTECH Hygro 322	SD700 SD700	A083330 A083322	2018-09-07 2018-09-07	2019-09-07 2019-09-07

APPENDIX C: Revisions to Original Test Report

Specimen: Insulated 24 in. on center steel stud gypsum board wall, 2 layers with RCSD on source side, 2 layers on receive side (See Full Report)

Date	Revision
2019-04-22	Original report issued

END



® RIVERBANK ACOUSTICAL LABORATORIES IS ACCREDITED BY NVLAP (LAB CODE 100227-0) FOR ACOUSTICAL TESTING SERVICES IN ACCORDANCE WITH ISO/IEC 17025:2005 AND FOR THIS PROCEDURE. THIS REPORT MUST NOT BE USED BY THE CLIENT TO CLAIM PRODUCT CERTIFICATION, APPROVAL, OR ENDORSEMENT BY RAL, NVLAP, NIST, OR ANY AGENCY OF THE U.S. GOVERNMENT. THIS REPORT SHALL NOT BE MODIFIED WITHOUT THE WRITTEN APPROVAL OF RAL. THE RESULTS REPORTED APPLY ONLY TO THE SPECIFIC SAMPLE SUBMITTED FOR TESTING; RAL ASSUMES NO RESPONSIBILITY FOR THE PERFORMANCE OF ANY OTHER SAMPLE.

WALLACE CLEMENT SABINE

RALTM-TL19-095

Page 10 of 10